

LIQUID WRAP

- **Water Repellent When Properly Sealed**
- **Will Not Support Growth Of Bacteria**
- **Disinfects Easily**
- **Adhesive Resists Most Cleaners And Disinfectants**

4' Pcs. Put-Ups

Nominal Size	Part #	Wall Thickness	Bulk Box	Box 8x8	Box 6x6	Box 4x4	Available Colors	Lbs/ 10Pcs.
3/8"	L6N0.38	0.046"	250	90	50	30	2	0.9
1/2"	L6N0.50	0.046"	250	70	40	25	2	1.0
3/4"	L6N0.75	0.046"	125	50	30	15	2	1.8
1"	L6N1.00	0.046"	88	30	20	9	2	2.2
1 1/4"	L6N1.25	0.046"	63	20	10	6	2	2.6

Stylish Fluid Protection For Wires & Cables

Our new L6 Liquid Wrap semi-rigid wraparound sleeving is engineered from tough braided polyester, and laminated with a layer of strong Mylar sheeting. This combination provides a strong and lightweight solution for any application that requires protection from repeated exposure to the elements.

The wraparound construction, with 12% edge overlap makes installation easy over existing assemblies or harnesses, and the extra wide adhesive strip ensures a positive, aggressive seal against damage from exposure.

L6 is available in 4' pre-cut sticks in Black or White.

Colors Available:

2 = Black (BK) and White (WH).



Cut Cleanly
Scissor

Material

Laminated Polyester


Grade

L6N

Monofilament Diameter

NA

L6 is ideal for marine and automotive wiring harnesses, and also for cable management in medical applications.

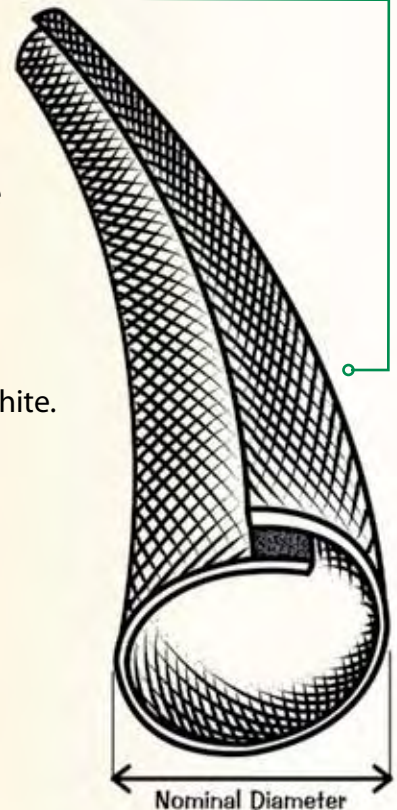



LIQUID WRAP



Abrasion Resistance
NA



Chemical Resistance

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents	2
Aliphatic Solvents	1
Chlorinated Solvents	2
Weak Bases	1
Salts	1
Strong Bases	3
Salt Water <i>0-S-1926</i>	1
Hydraulic Fluid <i>MIL-H-5606</i>	1
Lube Oil <i>MIL-L-7808</i>	1
De-Icing Fluid <i>MIL-A-8243</i>	1
Strong Acids	3
Strong Oxidants	2
Esters/Keytones	1
UV Light	1
Petroleum	1
Fungus <i>ASTM G-21</i>	1
Halogen Free	Yes
RoHS	Yes
SVHC	None

Melt Point

ASTM D-2117

482°F (250°C)


Maximum Continuous

Mil-I-23053

257°F (125°C)

Minimum Continuous

-94°F (-70°C)

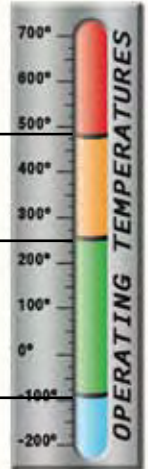

PHYSICAL PROPERTIES

Monofilament Diameter _____ **NA**
ASTM D-204

Flammability Rating _____
FMVSS-302 Approved

Recommended Cutting _____ **Scissor**

Colors _____ **2**

Wall Thickness _____ **.046**

Tensile Strength (Yarn) _____
ASTM D-2256 Lbs

Specific Gravity *ASTM D-792* _____ **NA**

Moisture Absorption _____ **NA**
% *ASTM D-570*

Hard Vacuum Data *ASTM E-595 at 10-5 torr*

TML _____

CVCM _____

WVR _____

Smoke D-Max _____
ASTM E-662

Outgassing _____

Oxygen Index _____
ASTM D-2863